


BEJ-1804S

Eco Solvent Printer (with four I3200-E1 heads)



Four I3200-E1 Heads

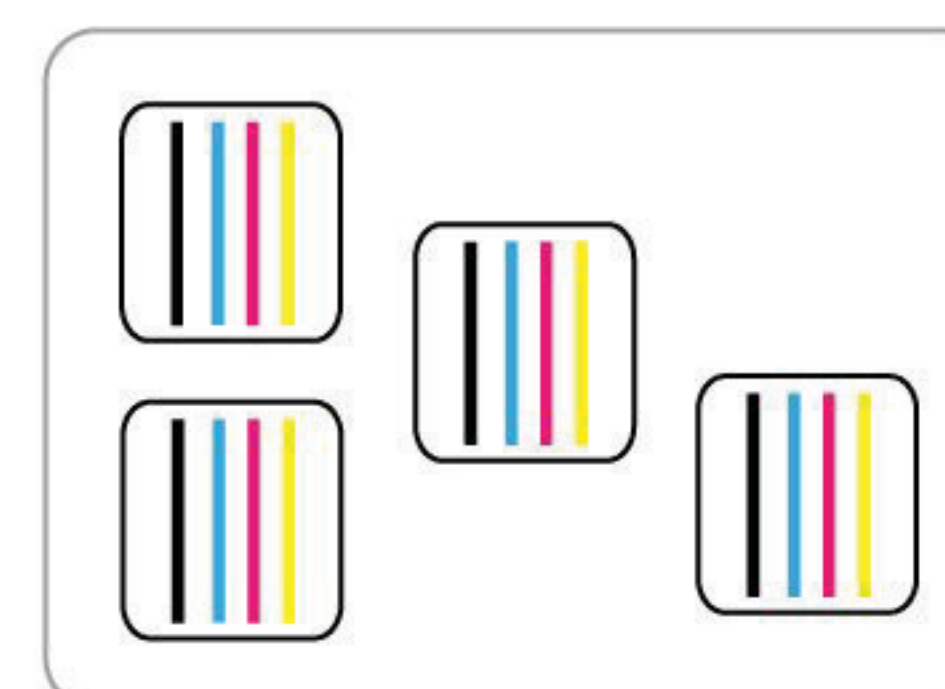

* 1.8m Four I3200-E1 Print Heads Speed

360x2400dpi - 4pass	84 m ² /h
720x1800dpi - 6pass	62 m ² /h
720x2400dpi - 8pass	47 m ² /h

Grando Eco Solvent Ink



Our range of wide format inkjet printers matches our knack for engineering and quality with your desire for impeccable performance and careless production. You can produce roll-to-roll indoor prints and long term outdoor signs. Wide applications in light box posters, customized car stickers, background wall cloth, label printing, advertising sign, subway advertising, shopping mall advertising signs etc.




● Technical Specifications

Model	BEJ-1804S
Print Head	Four I3200-E1 Print Heads
Printing Technology	Piezoelectric Inkjet
Acceptable Media	Width 71.6 in.(1820 mm)
	Thickness Maximum 59 mil(1.5 mm)
Printing Width	Weight 132.2 lb.(60 kg)
	70.8 in.(1800 mm)
Ink Cartridges	Type Eco Solvent Ink
	Capacity 4*4 CISS (220ml ink cartridge with 1.5L ink tank)
Printing Resolution	Color 4 colors (Cyan, Magenta, Yellow, Black)
	Maximum 2400 dpi
Printing Speed	4pass(360x2400dpi) : 84 sqm/h
	6pass(720x1800dpi) : 62 sqm/h
	8pass(720x2400dpi) : 47 sqm/h
Media Heating System	Intergrated post heater & Infrared Dryer & Fan system
Interface	USB 2.0
Power Supply	AC 220V ± 10%, 50/60 HZ
Dimensions(with stand)	125.3(W)x38.1(D)x54.5(H) in.
	(3213(W)x970(D)x1388(H) mm)
Weight(with stand)	882 lb. (400 kg)
Package Dimensions	Entirety Packing : 132.8(W)x39.8(D)x62.3(H) in. (3380(W)x1010(D)x1600(H) mm)
	Split Packing: 132.1(W)x31.4(D)x40.1(H) in. (3360(W)x800(D)x1020(H) mm)
Package Weight	Entirety Packing : 1102.5 lb. (500 kg) Split Packing : 860 lb. (390 kg)
Environment	Power on Temperature: 59 ℉ to 90 ℉ [15 C to 32 C] [68 ℉ [20 C] / Humidity: 35 to 80% (no condensation)
	Power off Temperature: 41 ℉ to 104 ℉ [5 C to 40 C] / Humidity: 20 to 80% (no condensation)
Accessories	USB cable, media clamp, manual, drain bottle, ink cartridges, RIP software, etc.



THK high-precision mute rail

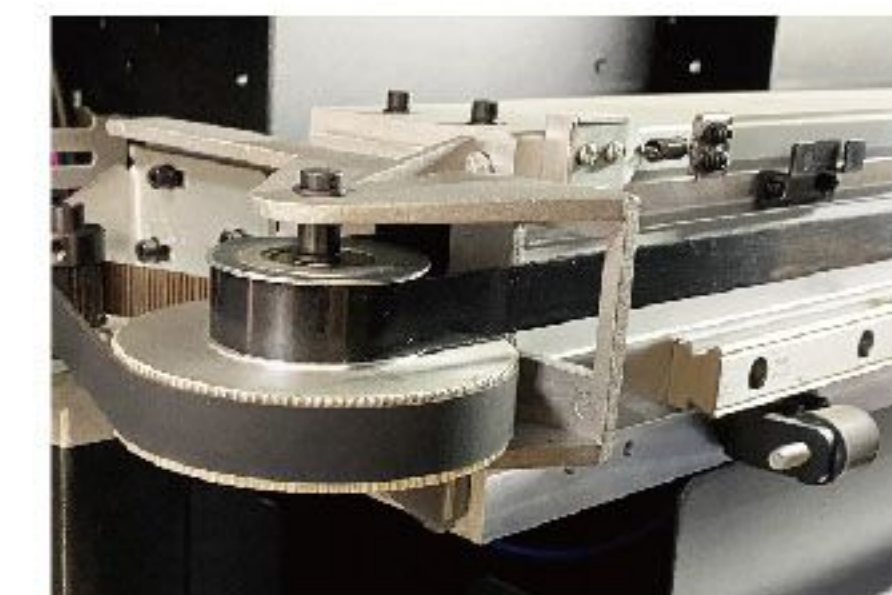

High-precision and high-stability tensioning pulley system



The automatic cleaning assembly adds a single-way valve to increase the stability of the ink supply



New pinch roller structure of three in group brings more stable feeding precision



Equipped with 4pcs authorized I3200-E1 print heads,high precision, high speed, high stability.



Bulky ink bottle with low-ink alarm represents the advanced concept of industrial application



Three stage heating system including pre-heater, print heater, and rear heater and platform vacuum system with adjustable power.



External power supply, intelligent rolling system.